


MTP(8) REINFORCED CONNECTION ASSEMBLY OS2

FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL

MTP(8) REINFORCED CONNECTION ASSEMBLY is a high-density double jacketed fiber optic cable with single connectors at the ends containing 8 fibers and designed for fast and compact connections in data centers and high-speed networks.

High-quality MTP® connectors provide very low insertion loss and reliable long-term support for high-speed network applications. Double jacketed cable provides additional mechanical protection, so it can be used for connecting both inside the rack and between the racks of the row, as well as between the rows of racks .

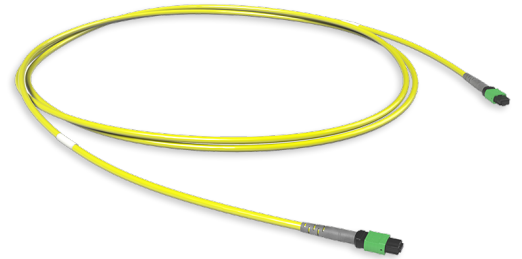

SPECIFICATION

SKU	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL
MTP Jumper Type	Reinforced Assembly
Fiber Type	OS2 9/125 SMF
Fiber Count	8
Connector A	8F MTP APC male
Connector B	8F MTP APC male
Polarity	Type B
Loss Class	Ultra Low Loss
Connector A Insertion Loss	≤ 0,12 dB (typ.); ≤ 0,25 dB (max.)
Connector A Return Loss	≥ 60 dB
Connector B Insertion Loss	≤ 0,12 dB (typ.); ≤ 0,25 dB (max.)
Connector B Return Loss	≥ 60 dB
Cable Structure	Dual Jacket
Cable Attenuation	≤ 0,32 dB/km @1310 nm; ≤ 0,18 db/km @1550 nm
Cable Outside Diameter	4,8 mm
Cable Jacket	LSZH
Min. Bend Radius	20/10D (Dynamic/Static)
Tensile Strength	Cable: 500 N (Installation); 300 N (In Service)
Operating Temperature	-10 to 50°C
Storage Temperature	-20 to 60°C

Part Numbers

A313NN80010	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 10 m
A313NN80015	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 15 m
A313NN80020	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 20 m

Part Numbers (continue)

A313NN80030	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 30 m
A313NN80035	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 35 m
A313NN80040	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 40 m
A313NN80045	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 45 m
A313NN80050	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 50 m
A313NN80055	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 55 m
A313NN80060	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 60 m
A313NN80070	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 70 m
A313NN80080	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 80 m
A313NN80090	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 90 m
A313NN80100	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 100 m
A313NN80110	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 110 m
A313NN80120	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 120 m
A313NN80130	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 130 m
A313NN80140	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 140 m
A313NN80150	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 150 m
A313NN80160	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 160 m
A313NN80170	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 170 m
A313NN80180	FO Reinforced Connection Assembly 8 x 09/125 OS2, MTP(8)APCm/MTP(8)APCm, type B, LSZH, ULL, 180 m